

16RT



ROCK SOLID PERFORMANCE

- Sleeper Cabin, optional load body. Ready to use
- 5350 mm wheel base to suit variety of needs
- 4 Cylinder CRDI Engine with superior fuel economy
- Reliable & Durable — Heavy Duty performance

16RT

Bharat Stage III



Application : Market Load, Cement, Parcels, Courier, Logistics, Tankers etc.

Technical Specifications

Model	16RT	Brakes	Dual circuit, air pressure exhaust brake
Wheel base (mm)	5350	Wheel	7.0- 20
GVW (Kgs)	12400	Tyres	9.00 X 20 16 PR
Payload (Kgs)	7000	Turning radius (m)	9
Engine	BS-III (4 Cylinders) CRDI, Displacement: 4.752L	Ground clearance real axle (mm)	245
Max. power	110kw@2300rpm	Gradeability	26%
Max.torque	530Nm@1400rpm	Fuel tank	160lts
Transmission	6 forward and 1 reverse	Max. speed	108km/h
Clutch	Single plate, Dry type, Hydraulic controlled, ϕ 350(mm)	Battery	12V - 120V/Ah
Rear axle (Kgs)	1200	Cabin & chassis (Kgs)	4120
Front axle (Kgs)	600	Cabin & Load body (Kgs)	5340
Steering	Power steering	Length (mm)	8832
Frame	237x75x7	Width (mm)	2290
Suspension	Semi-elliptical, multi leaf spring	Height (mm)	2630

CAUTION : Do not weld or drill on chassis frame. Accessories shown in the picture or elsewhere do not constitute standard fitment. The specifications are subject to change without notice. These are indicative specifications for reference only.

All dimensions in mm

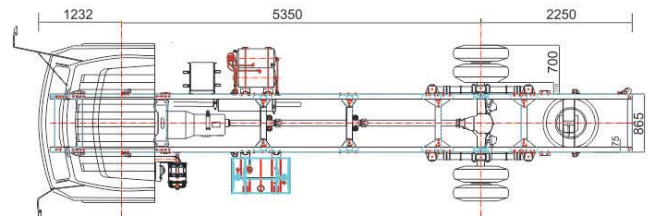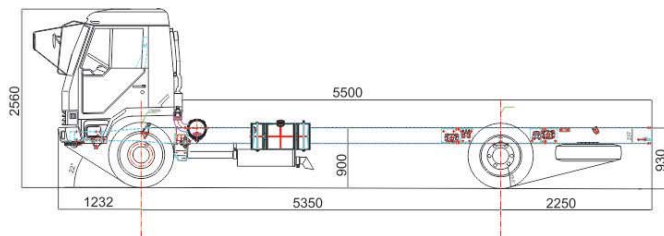

Trucks from URAL India Ltd.

For further details :
URAL INDIA LTD.
 Motijug House 1, Auckland Place, Kolkata - 700017
 Phone : +91.33.2283 1748 / 49 / 50
 Fax : +91.33.2280 0670
 E-mail : uralindia@vsnl.net
 Visit us at : www.uralindia.co.in

Authorised Dealer